



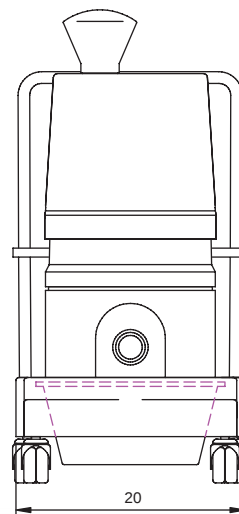

# DS 1150M-B1 Vacuum System

## Explosion Proof

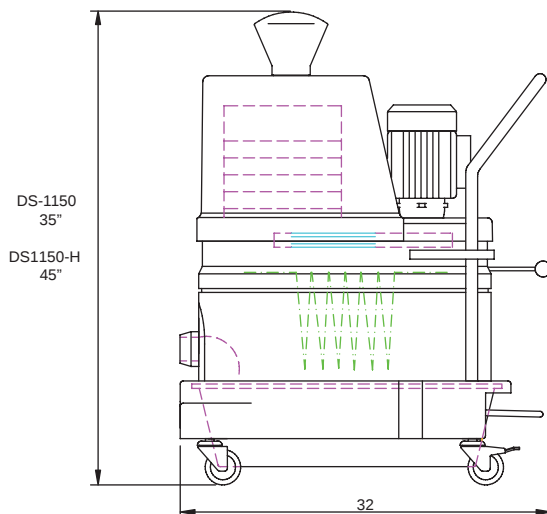

### DS1150M-B1 STANDARD SPECIFICATIONS

#### DS1150M-B1

2 HP Motor, 400 Volt, Three Phase, 60 Hz  
Explosion Proof Motor & Switch, Class I & Class II  
13 square foot MicroClean BVSC Filter, Manual Shaker System  
40 square foot HEPA Filter with Minihelic (optional)  
2" (50mm) Inlet Connection with Bronze Cast Deflector  
Multi-Stage Centrifugal High Performance Turbine with Relief Valve  
9 Gallon, Foot Lever Actuated Dustpan  
Counterbalanced Base, 3" Heavy Duty Conductive Casters  
Compression Cast Composite Modular Housing  
Carbon Impregnated, Anti-Static  $10^{-6}$  Ohms



**FRV 1150 Price: \$10285.00**  
**FRV 1150-H Price: \$11503.00**

#### DEX Accessory Package: (Included)

Vacuum Hose: 1.5" x 10', Urethane, Static Conductive,  
Molded Carbon Impregnated Cuffs  
Wand: 54", Aluminum Shaft, 2 Bends  
Crevice Tool: 11", Aluminum Body  
Round Brush: 3", Nylon Bristles, Static Conductive, Carbon Impregnated  
Floor Brush: 14", Metal Body, Anti-Static Bristles  
Reducer: 2" x 1.5"



| ADDER | DESCRIPTION                                         | PRICE    |
|-------|-----------------------------------------------------|----------|
| 24000 | Static Conductive Disposable Dustpan Liner with Lid | \$ 36.50 |